TYPICAL SECTIONS

Interstate

Rural Half Section

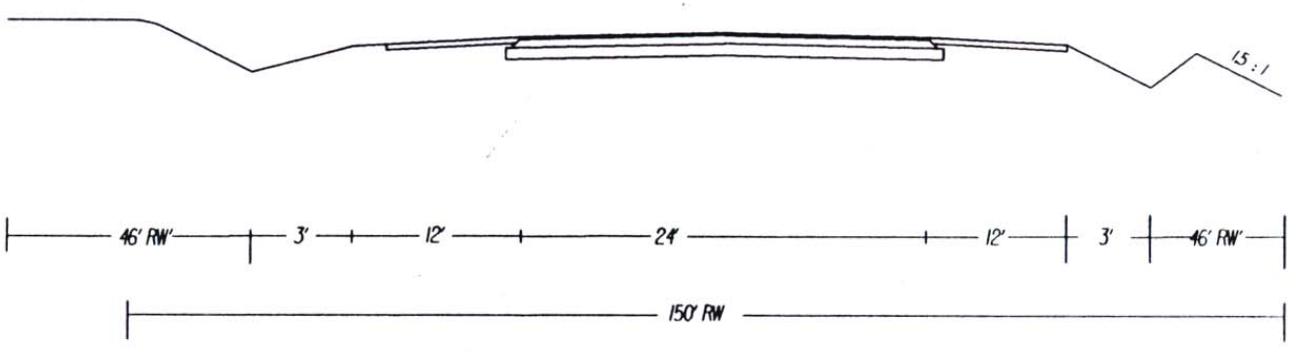

Urban Half Section

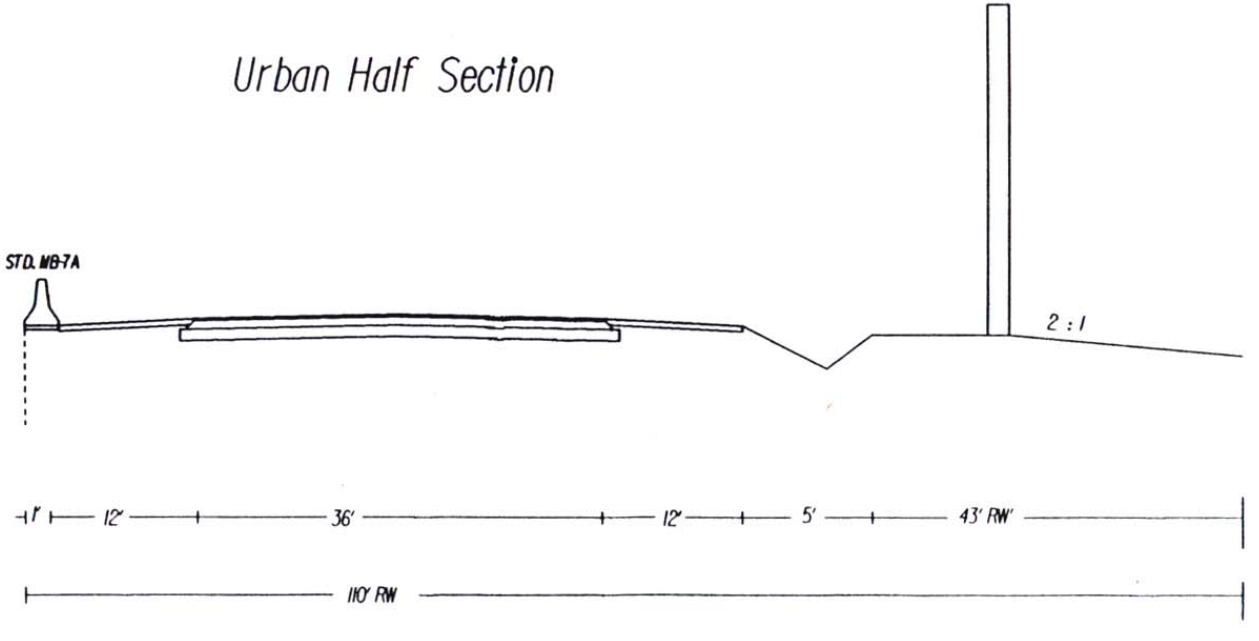

ASPHALT SECTION



1. 2" SM
2. 2" IM
3. 8" BM
4. 6" STAB. OPEN GRADE EXTEND 1' INTO SHOULDER AREA
5. 6" CEMENT TREATED 21A EXTEND 1' INTO SHOULDER AREA
6. 6" MANIPULATION (6% CEMENT) EXTEND 1' INTO SHOULDER AREA
7. 1.5" SM
8. 4" BM
9. 6.5" 21B 1' INTO SHOULDER AREA

CONCRETE SECTION



1. 9" CONCRETE
2. 6" STAB. OPEN GRADE EXTEND 1' INTO SHOULDER AREA
3. 6" CEMENT TREATED 21A EXTEND 1' INTO SHOULDER AREA
4. 6" CONCRETE TREATED 4A
5. 6" MANIPULATION (6% CEMENT) EXTEND 1' INTO SHOULDER AREA
6. 1.5" SM
7. 4" BM
8. 6" 21B