

### Courtland Interchange Replacement

#### Town of Courtland

**Cost:** \$15 Million

**Current Status:** Construction began March 2016. Completion December 2018.

**About the Project:** Improvements will consist of two bridges on a realigned Route 742 and the elimination of the existing signalized intersection at routes 58 and 58 Business in Courtland. The first bridge will be 525 feet long, crossing wetlands south of Route 58. The bridge will have two 12-foot lanes with 3-foot shoulders for a total width of 30 feet. The second bridge will be 224 feet long, crossing Route 58. The bridge will have two 12-foot lanes with 8-foot shoulders for a total width of 40 feet. Two roundabouts will be constructed, one north at the intersection of relocated Route 742 and Route 58 Business, and the second one south of Route 58 on relocated Route 742. All traffic moving in and out of Courtland will pass through at least one of these. Three ramps will be constructed to connect mainline Route 58 to the roundabouts to complete the interchange. Supporting drainage systems will be installed as part of the project improvements.



## Southampton County

### Route 35 Bridge Replacement Over Tarrara Creek

#### Town of Boykins

**Cost:** \$1.7 Million

**Current Status:** Construction began November 2016. Completion December 2017.

**About the Project:** This project will replace a structurally deficient bridge over Tarrara Creek that was built in 1946. Crews will replace the bridge and rebuild the approach roadway to tie into the new bridge. The new bridge will be 104 feet long and 32 feet wide with two 11-foot lanes and 3-foot shoulders. Six-foot sidewalks with curbs will be added for bicycles and pedestrians. The project also includes guardrail improvements at the bridge approaches. Temporary traffic signals will maintain one-lane/two-way traffic during construction.




Existing Route 35 Bridge over Tarrara Creek

### Route 659 Over Flat Swamp Creek Replacement

**Cost:** \$1.3 Million

**Current Status:** Completed November 2016.

**About the Project:** This project demolished and replaced the bridge over Flat Swamp Creek and rebuilt the approach roadways to tie into the new bridge. The new bridge is 50 feet long and 27 feet wide.

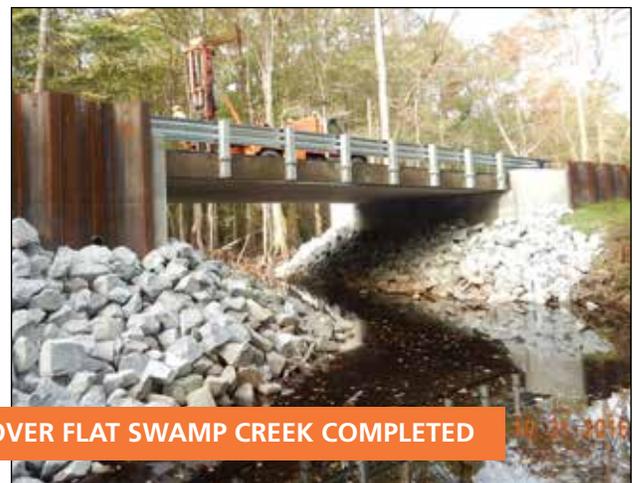

RT 659 BRIDGE OVER FLAT SWAMP CREEK COMPLETED

## Sussex County

### Route 301 Bridge Replacement Over Nottoway River

#### Sussex County

**Cost:** \$2.7 Million

**Current Status:** Construction began September 2016. Completion December 2017.

**About the Project:** The project will replace the Route 301 Bridge over Nottoway River and rebuild the approach roadway to tie into the new bridge. The bridge will close to northbound and southbound traffic during construction. Signed detours will be in place for motorists.

