


STATE	FEDERAL AID	STATE	SHEET
ROUTE	PROJECT	ROUTE	PROJECT
VA.			NO.

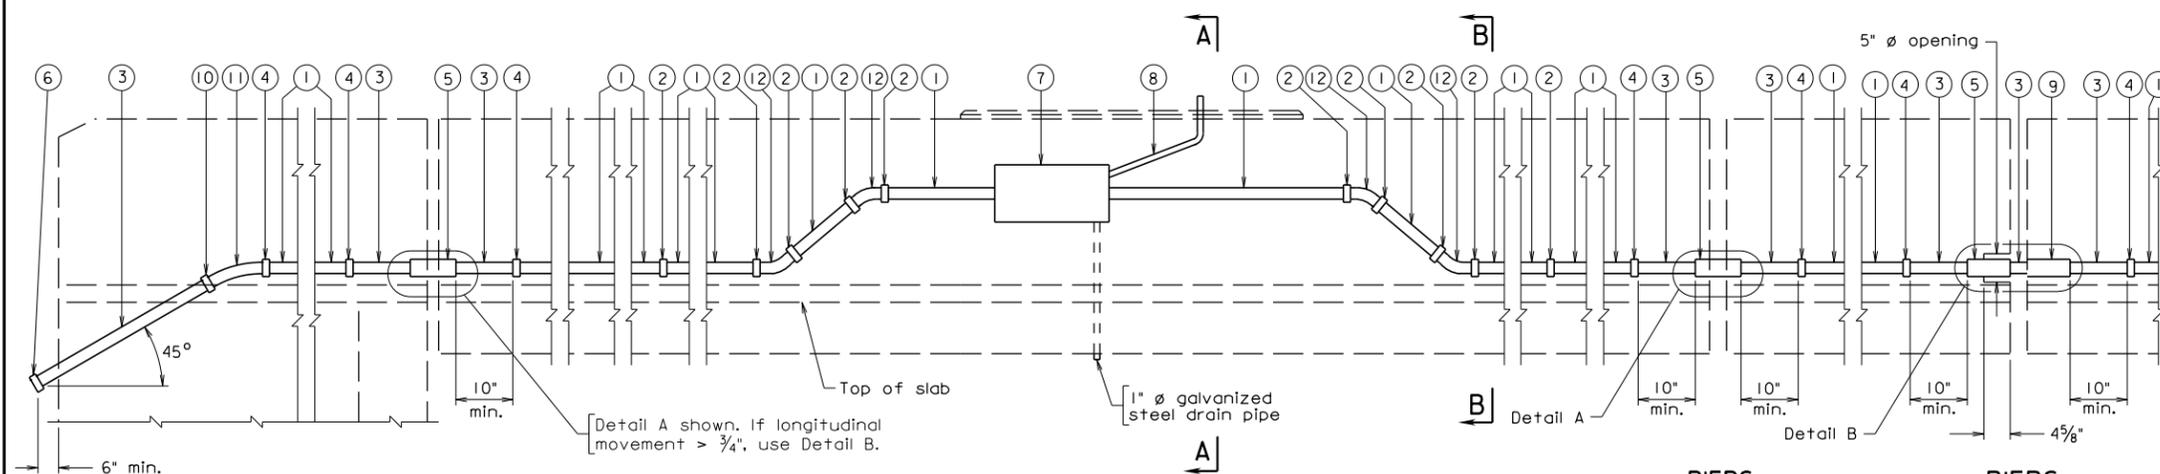

Notes:

All reinforcing bars shall be Corrosion Resistant Reinforcing Steel, Class ...

Cut or bend bars to clear junction chamber.

Close adherence to the manufacturer's requirements in regard to clearances for the installation of deflection fittings shall be observed.


Junction chamber frame and cover to be galvanized, after fabrication, in accordance with ASTM A123.

Cost of Bridge Conduit System and anchorages shall be included in price bid for parapet.

Anchor bolt specifications:

Nuts (Top): ASTM F467 Alloy 6262-T9 or 6061-T6.  
 (Bottom): ASTM A563.  
 Thread series for all nuts to be UNC-2B.  
 Washers: (Top): ASTM B209 Alloy Alclad 2024-T3 or T4, 2 1/4"  $\phi$  x 0.165".  
 (Bottom): ASTM F844.  
 Rods: 1" diameter, ASTM A276, type 430 or 410 annealed, hot-finished. Threads on rods may be rolled or cut. 3/2" at each end of rod shall be threaded. Each rod shall be supplied with 3 washers and 3 nuts.

- ① 2"  $\phi$  nonmetallic conduit
- ② Nonmetallic coupling
- ③ 2"  $\phi$  metal conduit
- ④ Adapter to connect nonmetallic conduit to metal conduit
- ⑤ Metal expansion and deflection fitting
- ⑥ 2"  $\phi$  pipe cap
- ⑦ 8" x 6" x 1'-4" formed junction chamber
- ⑧ 1"  $\phi$  metal conduit.
- ⑨ Metal expansion fitting
- ⑩ Pipe coupling
- ⑪ 2"  $\phi$  45° 13" R steel elbow
- ⑫ 2"  $\phi$  45° 9 1/2" R nonmetallic elbow

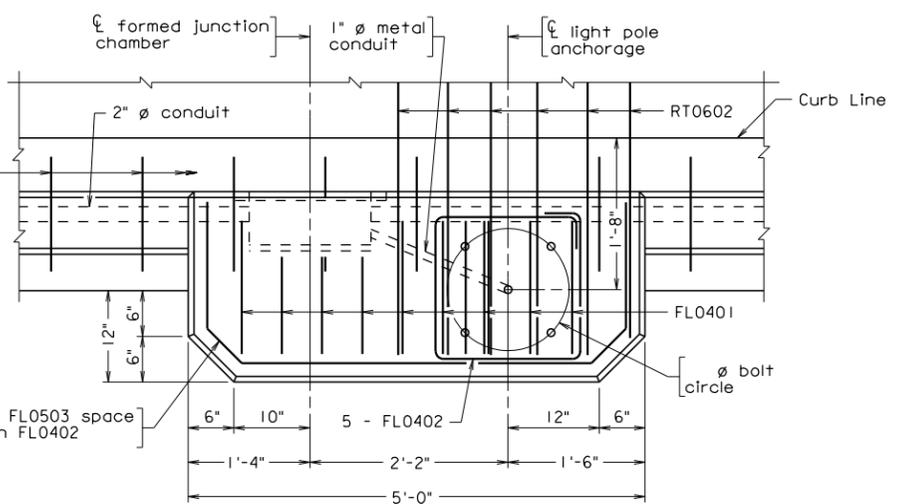

Abutment	Pier	Longitudinal Movement	t	Detail Type
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.


When deck is continuous over pier, expansion and deflection fitting detail is not required.

In the designations noted above, top refers to hardware above the top of baseplate. Bottom refers to hardware below the baseplate including embedment in concrete.

Longitudinal movement is the maximum amount of movement of the expansion and deflection fitting calculated for placement at 60° F and shall be adjusted in accordance with manufacturer's requirements. The amount of movement shall be increased or decreased for every 10° F temperature drop or rise respectively by t.

The Contractor shall determine all dimensions and details necessary for installation.



Conduit shall be grounded in conformance with Section 700 with grounding materials that conform to Section 238.

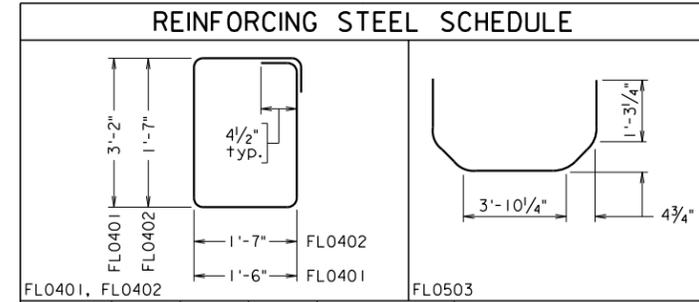

Mark	No.	Size	Pin $\phi$	Length	Location
FL0401		#4	2"	9'-8"	Light base
FL0402		#4	2"	6'-8"	Light base
FL0503		#5	3 3/4"	7'-5"	Light base
RV0401	⊙	#4			
RV0502	⊙	#5			
RV0503	⊙	#5			
RT0401	⊙	#4			
RT0602		#6			Top of deck slab

Dimensions in bending diagram are out-to-out of bars.

⊙ Bars RV0401, RV0502, RV0503 and RT0401 are detailed and accounted for on parapet detail sheet.

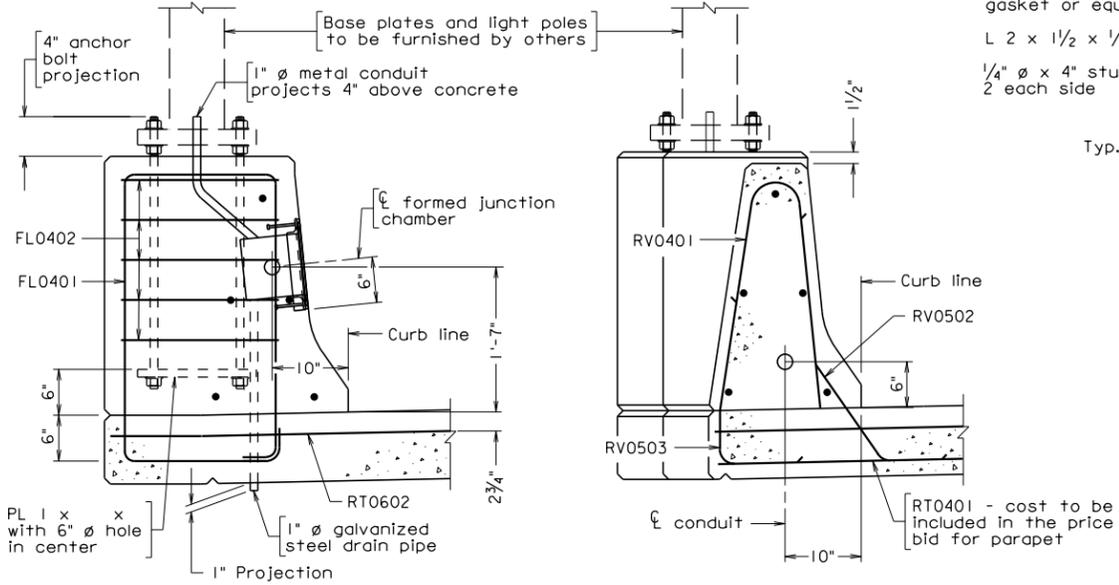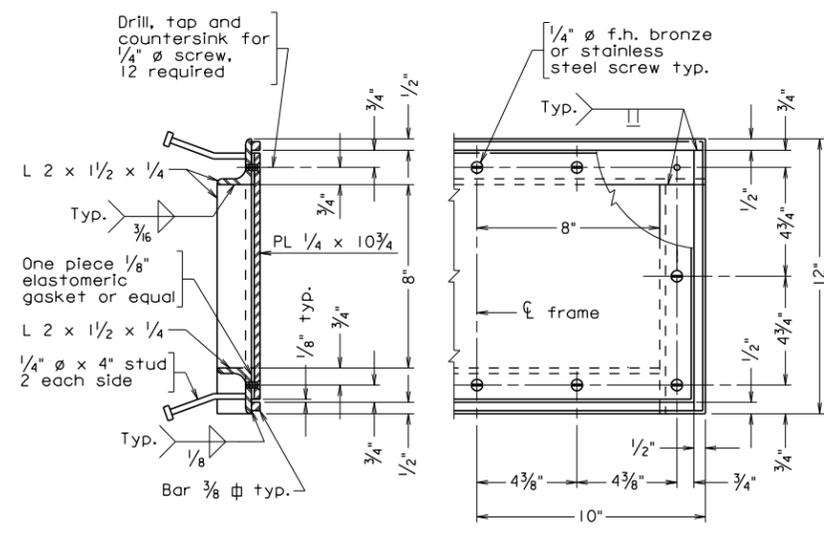

BCS-28A 08-07-2012 bcs28a.dgn

Sealed and Signed by:  
 Julius F.J. Volnyi Jr.,  
 Lic. No. 010487  
 On the date of  
 Aug. 7, 2012

A copy of the original sealed and signed standard drawing is on file in the Central Office.

VDOT S&B DIVISION  
 RICHMOND, VA  
 STRUCTURAL ENGINEER

COMMONWEALTH OF VIRGINIA DEPARTMENT OF TRANSPORTATION STRUCTURE AND BRIDGE DIVISION					
<b>BRIDGE CONDUIT SYSTEM</b>					
No.	Description	Date	Designed: .....	Date	Plan No.
			Drawn: .....		Sheet No.
			Checked: .....		<b>BCS-28A</b>
Revisions					

**BRIDGE CONDUIT SYSTEM  
FOR LIGHTING  
WITH F-SHAPE PARAPET**

**NOTES TO DESIGNER:**

Standard is to be used only when lighting is installed as part of project and used with F-shape parapet (standard BPB-3A or BPB-3B). Terminal wall for parapet is located on abutment or U-back wing.

Access to junction chamber is from the inside of the parapet face on the traffic side.

Light pole anchorage is designed in accordance with AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals*, 4<sup>th</sup> Edition (2001), including Interim Specifications. Design requirements are as follows:

Pole mounting height: 40 feet  
Pole size: avg. 6" O.D. (8" O.D. on base)  
Bracket arm: length: 6'-0"; weight of truss: 15 lbs.  
Size of luminaire: 3.2 sq. ft.  
Weight of luminaire: 81 lbs.  
Bolt circle for anchorage (base plate): 11" diameter thru 16" diameter

Light pole anchorage is to be located no closer than 4 feet to abutment (backwall) or parapet joint. Show location of centerline of light pole anchorage(s) on appropriate plan sheet, normally plan of deck slab.

Size of junction chamber: 8" x 8" x 1'-4". Conduit size: 2" diameter. Show location and size of conduit(s) on transverse section sheet. Show location of junction chambers on appropriate plan sheet, normally plan of deck slab.

For larger conduits the bend radius in the conduit (steel elbow and nonmetallic elbow) and the run of the junction chamber need to be changed in the CONDUIT LAYOUT. The minimum run for the junction chamber is 8 x nominal diameter of conduit. For example, the minimum run for a 2" dia. conduit is 1-4" (8 x 2" = 16" = 1'-4"). If larger conduit is used, JUNCTION CHAMBER FRAME needs to be adjusted, i.e., spacing of screws needs to be adjusted. Also, the size of the concrete blister needs to be adjusted to provide additional space between the junction chamber and the light anchorage.

Longitudinal movement (for filling table):

Coefficient of linear expansion of:

concrete: 0.000006 in./in./°F (AASHTO *Standard Specification for Highway Bridges*, 1996; 1997 and 1998 Interim Specifications; and VDOT modifications, Article 8.5.3)

steel: 0.0000065 in./in./°F (AASHTO *Standard Specification for Highway Bridges*, 1996; 1997 and 1998 Interim Specifications; and VDOT modifications, Article 10.2.2)

**BRIDGE CONDUIT SYSTEM  
FOR LIGHTING  
WITH F-SHAPE PARAPET**

**NOTES TO DESIGNER (cont'd):**

Temperature ranges (AASHTO *Standard Specification for Highway Bridges*, 1996; 1997 and 1998 Interim Specifications; and VDOT modifications, Article 3.16):

concrete structures: 40°F

steel structures: 60°F

Example: Steel structure, 250 feet of expansion

Longitudinal movement =  $250 \times 0.0000065 \times 60 = 0.0975 \text{ ft} = 1 \frac{1}{8} \text{ in.}$

t (movement/10°F) =  $250 \times 0.0000065 \times 10 = 0.01625 \text{ ft} = \frac{3}{16} \text{ in.}$

**ADD THE FOLLOWING NOTES, DIMENSIONS, DETAILS, ETC. TO STANDARD:**

PLAN:

Add diameter of bolt circle.

SECTION A-A:

Add size of plate.

TABLE:

Complete table. Use  $\frac{1}{8}$ " multiples for longitudinal movement. Use  $\frac{1}{16}$ " multiples for t (movement/10°F).

NOTES:

Complete first note by adding the Class I, II or III of corrosion resistant reinforcing steel required. (For additional information on corrosion resistant reinforcing steels (CRR), see Structure and Bridge Division Memorandum (current IIM-S&B-81).